DIGITAL PROTRACTOR



Absolute function, zero setting is unnecessary when the battery is replaced




 Used as level and inclinometer to measure the included angle of non-continuous working surfaces



· V-groove base with powerful embedded magnets, which secures strong attachment to the measuring surfaces (including cylindrical surface)





· Backlight function enables it to use in the dim place









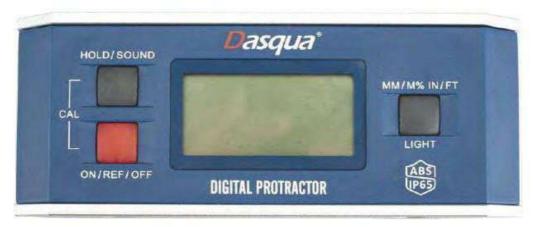









| Code | Range | Resolution | Accuracy |
|-----------|---------|------------|-----------------------|
| 3400-0005 | 4 x 90° | 0.1° | 0°-90°:±0.05° |
| | | | Rest of angle: ±0.15° |