


Dasqua

FEELER GAUGE



DIN 2275

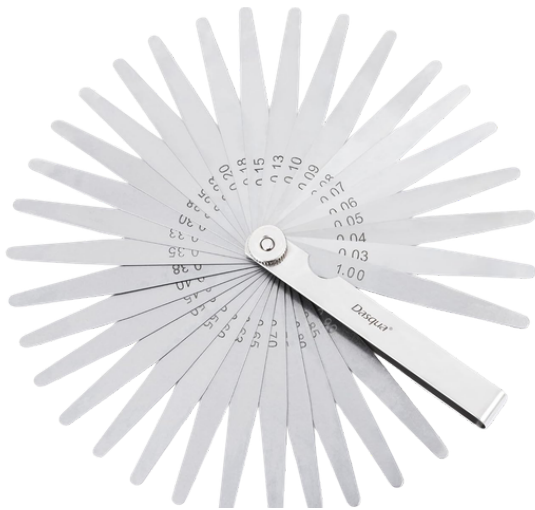

Description

- Suitable for electronic equipment, mold manufacturing, automotive, automation equipment, precision machinery, metal parts, machinery parts and so on
- Strictly made in accordance with DIN2275
- High tolerance accuracy for precise measurements
- Hardened spring steel, conical shaped blades
- Nickel plated case with lock nut
- The numbers of size are etched into feeler gauge for easy identification.
- Polished surface, durable and smooth

Code	Length	Range	Amount(Pcs)	Including
1825-0175	75	0.04-1.00	25	0.04,0.05,0.06,0.07,0.08,0.09,0.10,0.15,0.20,0.25,0.30,0.35,0.40,0.45,0.50,0.55,0.60,0.65,0.70,0.75,0.80,0.85,0.90,0.95,1.00
1813-0100	100	0.05-1.00	13	0.05,0.10,0.15,0.20,0.25,0.30,0.40,0.50,0.60,0.70,0.80,0.90,1.00
1813-1100	100	0.03-0.5	13	0.03,0.04,0.05,0.06,0.07,0.08,0.09,0.10,0.15,0.20,0.30,0.40,0.50
1817-0100	100	0.02-1.00	17	0.02,0.03,0.04,0.05,0.06,0.07,0.08,0.09,0.10,0.15,0.20,0.25,0.30,0.40,0.50,0.75,1.00
1820-0100	100	0.05-1.00	20	0.05,0.10,0.15,0.20,0.25,0.30,0.35,0.40,0.45,0.50,0.55,0.60,0.65,0.70,0.75,0.80,0.85,0.90,0.95,1.00
1828-0100	100	0.05-1.00	28	0.05,0.06,0.07,0.08,0.09,0.10,0.11,0.12,0.13,0.14,0.15,0.20,0.25,0.30,0.35,0.40,0.45,0.50,0.55,0.60,0.65,0.70,0.75,0.80,0.85,0.90,0.95,1.00
1832-0100	100	0.03-1.00	32	0.03,0.04,0.05,0.06,0.07,0.08,0.09,0.10,0.13,0.15,0.18,0.20,0.23,0.25,0.28,0.30,0.33,0.35,0.38,0.40,0.45,0.50,0.55,0.60,0.63,0.65,0.70,0.75,0.80,0.85,0.90,1.00
1813-0150	150	0.05-1.00	13	0.05,0.10,0.15,0.20,0.25,0.30,0.40,0.50,0.60,0.70,0.80,0.90,1.00
1817-0150	150	0.02-1.00	17	0.02,0.03,0.04,0.05,0.06,0.07,0.08,0.09,0.10,0.15,0.20,0.25,0.30,0.40,0.50,0.75,1.00
1820-0150	150	0.05-1.00	20	0.05,0.10,0.15,0.20,0.25,0.30,0.35,0.40,0.45,0.50,0.55,0.60,0.65,0.70,0.75,0.80,0.85,0.90,0.95,1.00
1813-0200	200	0.05-1.00	13	0.05,0.10,0.15,0.20,0.25,0.30,0.40,0.50,0.60,0.70,0.80,0.90,1.00
1817-0200	200	0.02-1.00	17	0.02,0.03,0.04,0.05,0.06,0.07,0.08,0.09,0.10,0.15,0.20,0.25,0.30,0.40,0.50,0.75,1.00
1820-0200	200	0.05-1.00	20	0.05,0.10,0.15,0.20,0.25,0.30,0.35,0.40,0.45,0.50,0.55,0.60,0.65,0.70,0.75,0.80,0.85,0.90,0.95,1.00
1813-0300	300	0.05-1.00	13	0.05,0.10,0.15,0.20,0.25,0.30,0.40,0.50,0.60,0.70,0.80,0.90,1.00
1817-0300	200	0.05-1.00	17	0.02,0.03,0.04,0.05,0.06,0.07,0.08,0.09,0.10,0.15,0.20,0.25,0.30,0.40,0.50,0.75,1.00
1820-0300	300	0.05-1.00	20	0.05,0.10,0.15,0.20,0.25,0.30,0.35,0.40,0.45,0.50,0.55,0.60,0.65,0.70,0.75,0.80,0.85,0.90,0.95,1.00
1813-0500	500	0.05-1.00	13	0.05,0.10,0.15,0.20,0.25,0.30,0.40,0.50,0.60,0.70,0.80,0.90,1.00
1820-0500	500	0.05-1.00	20	0.05,0.10,0.15,0.20,0.25,0.30,0.35,0.40,0.45,0.50,0.55,0.60,0.65,0.70,0.75,0.80,0.85,0.90,0.95,1.00
1813-1000	500	0.05-1.00	13	0.05,0.10,0.15,0.20,0.25,0.30,0.40,0.50,0.60,0.70,0.80,0.90,1.00
1732-0035	90/3.5"	0.0015"-0.035"	32	0.04/0.0015",0.05/0.002",0.06/0.0025",0.08/0.003",0.10/0.004",0.13/0.005",0.15/0.006",0.18/0.007",0.20/0.008",0.23/0.009",0.25/0.011",0.28/0.011",0.30/0.012",0.33/0.013",0.35/0.014",0.38/0.015",0.40/0.016",0.43/0.017",0.45/0.018",0.48/0.019",0.50/0.021",0.53/0.021",0.55/0.022",0.58/0.023",0.60/0.024",0.63/0.025",0.65/0.026",0.70/0.028",0.75/0.03",0.80/0.032",0.88/0.035" Plus (1pc of Copper) 0.25/0.01"